


STARFIRE™ 40 DIRECT VENT GAS FIREPLACE


Specifications

Model	BTU	Width		Height		Depth		Glass
		Actual	Framing	Actual	Framing	Actual	Framing	Glass
HDX40	40,000	40 1/4	40 3/4	41	41 1/4	20 1/2	20 1/4	28 1/16 X 36 1/32

Overview

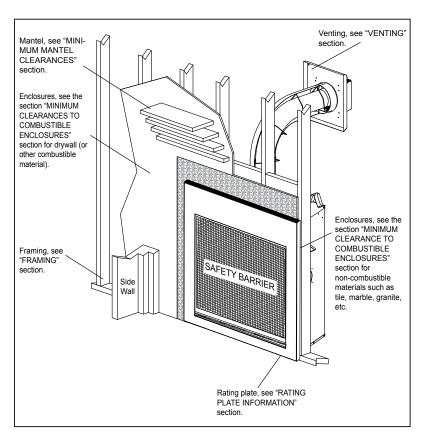

Dimensions

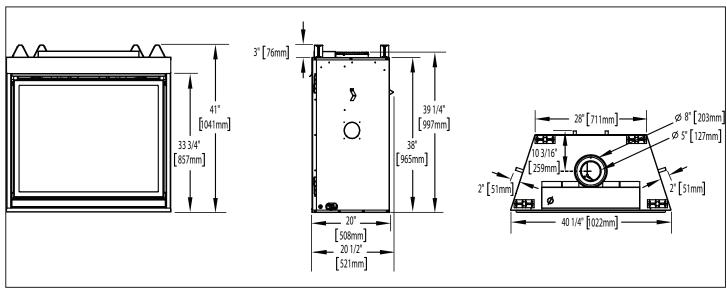


05/2015



STARFIRE™ 40 DIRECT VENT GAS FIREPLACE


Framing & Clearances

Minimum Fireplace Clearances

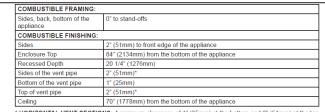


- **HORIZONTAL VENT SECTIONS: A minimum clearance of 1" (25mm) at the bottom and 2" (51mm) at the top and sides of the vent pipe in all horizontal runs to combustibles is required except for clearances in appliance enclosures. Horizontal vent sections within enclosures require a minimum clearance of 18" (457mm) at the top of the vent pipe. See "MINIMUM CLEARANCE TO COMBUSTIBLE ENCLOSURES" section. Use firestop spacer W010-1800 (supplied) where vent pipe penetrates combustible walls.
- * VERTICAL VENT SECTIONS: A minimum clearance of 1" (25mm) all around the vent pipe on all vertical VEX.IDEA VEX.IDEA TOWN. A minimum clearance of II (2011m) an around in the entrippe of an ventural runs to combustibles is required except for clearances in appliance enclosures. Vertical vent sections within enclosures require a minimum clearance of 4" (102mm) to the sides of the vent pipe. See "MINIMUM CLEARANCE TO COMBUSTIBLE ENCLOSURES" section. Use firestop spacer W500-0367 (not supplied) where vent pipe penetrates combustible ceilings or floors.


Appliance Location

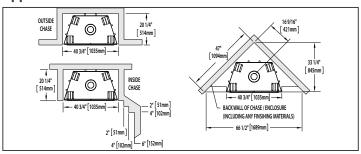

Minimum Vertical Vent Rise

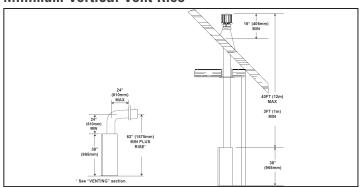


Combustible Mantel Clearances

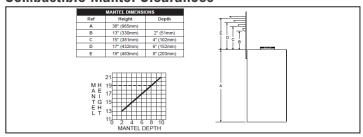


Product information provided is not complete and is subject to change without notice. Please consult the installation manual for the most up to date installation information.


Framing Dimensions

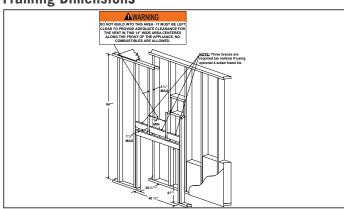


Wall Penetration

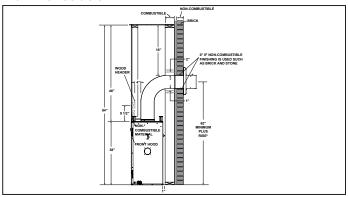

Alcove Installation

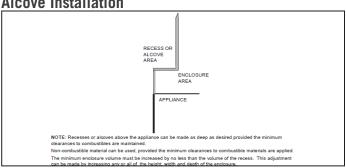

Non-Combustible Facing Material

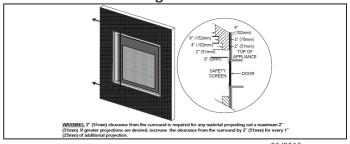

05/2015