


VITTORIA™ DIRECT VENT GAS FIREPLACE


Specifications

Model	BTU	Width		Height		Depth		Glass
		Actual	Framing	Actual	Framing	Actual	Framing	
GD19	11,500	21 3/4	22 1/4	34 1/8	39 3/8	15 3/8	13 1/4	24 X 16 5/8

Overview

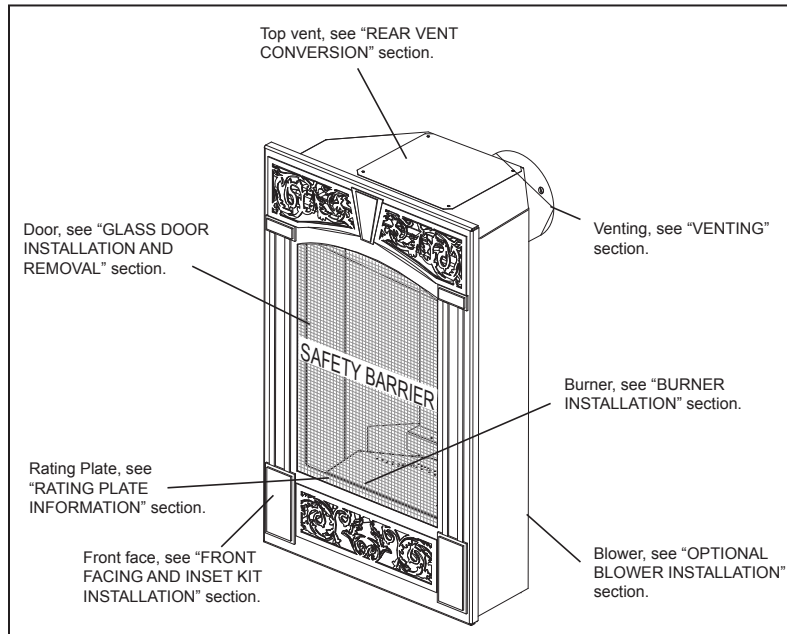

Dimensions

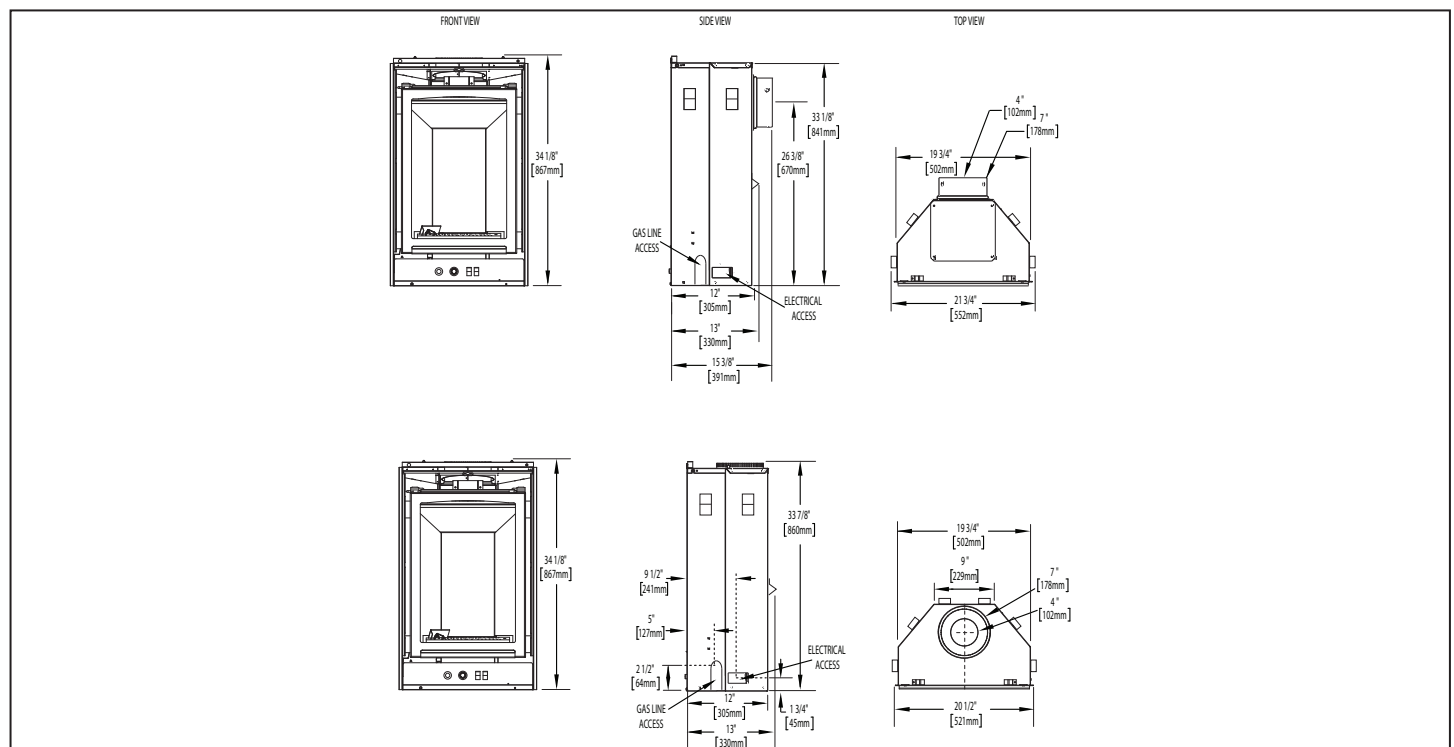

VITTORIA™ DIRECT VENT GAS FIREPLACE

Framing & Clearances

Minimum Fireplace Clearances

Minimum clearance to combustible construction from appliance and vent surfaces:

Combustible Framing:

- 0" to stand-offs
- 1" (25mm) to bottom and sides of the vent pipe*
- 2" (51mm) to top of the vent pipe*

Combustible Finishing:

- 0" to rear
- 0" to front face top and sides
- 13" (330mm) recessed depth

Rear Vent:

- 39 1/8" (994mm) to enclosure top from base of the unit
- 45 1/8" (1146mm) to ceiling from base of the unit


Top Vent:

- 53 1/8" (1349mm) to enclosure top from base of the unit
- 53 1/8" (1349mm) to ceiling from base of the unit


* **HORIZONTAL VENT SECTIONS** - A minimum clearance of 1" (25mm) at the bottom and sides and 2" (51mm) at the top of the vent pipe in all horizontal runs to combustibles is required except for clearances in appliance enclosures, see "MINIMUM ENCLOSURE CLEARANCES" section. Use firestop spacer W010-1777 (supplied).

* **VERTICAL VENT SECTIONS** - A minimum of 1" (25mm) all around the vent pipe on all vertical runs to combustibles is required. Use firestop spacer W500-0096 (not supplied).


Framing Dimensions

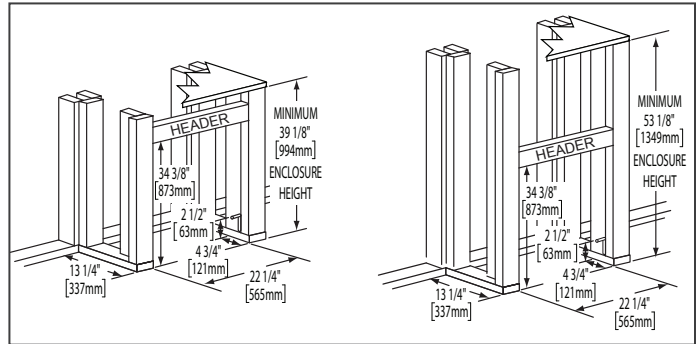


Appliance Location

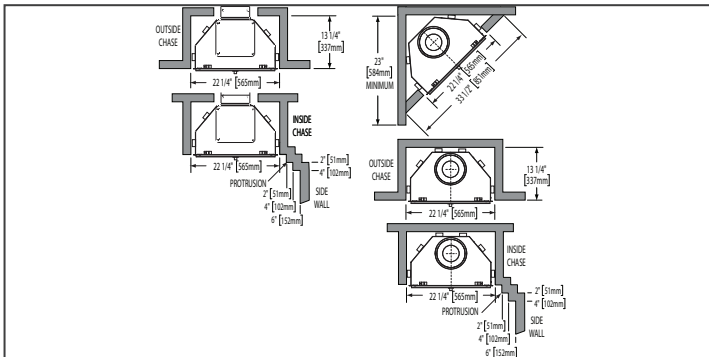

Wall Penetration


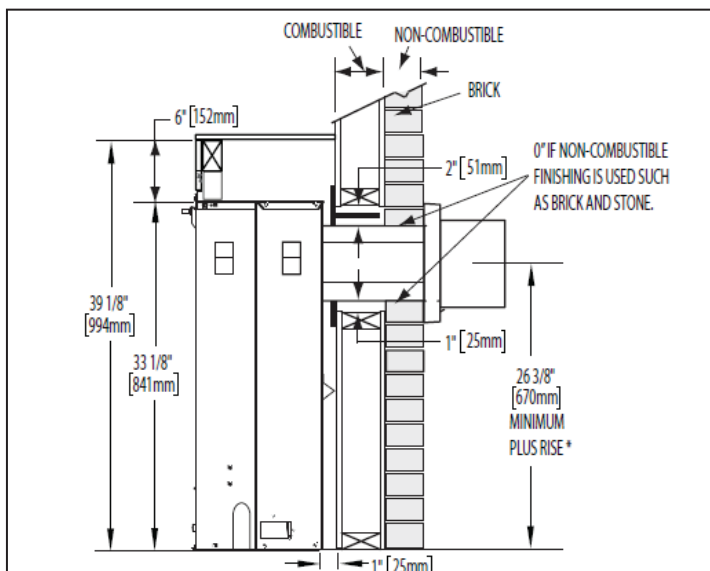


Minimum Vertical Vent Rise

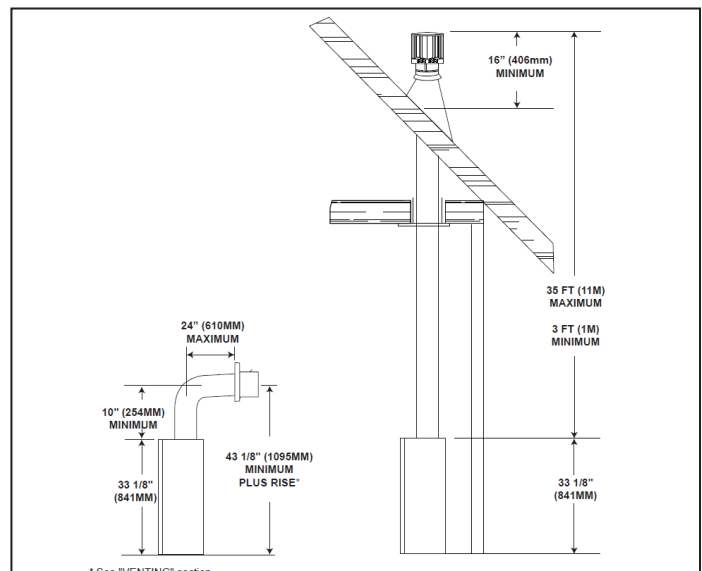

Combustible Mantel Clearances

Combustible materials must be installed flush with the front of the appliance but must not cover any of the black face-area of the appliance. Non-combustible material (brick, stone or ceramic tile) may protrude past the face of the appliance.



Product information provided is not complete and is subject to change without notice. Please consult the installation manual for the most up to date installation information.